




Engine type	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)
Model number	33S8
Series number	5210PX
Gross Torque (Nm) @ 3'600 rpm	37,59*
Displacement (cc)	540
Cylinder	Cast iron sleeve
Bore & stroke (mm)	94,0 x 77,8
Fuel tank capacity (l)	NA
Oil capacity (l)	1,4
Dry weight (kg)	30,8
Dimensions L x W x H (mm)	479 x 411 x 327
Features	AVS [®] ; advanced air filtration, full pressure lubrication with oil filter
Optional	ReadyStart [®] , durable package

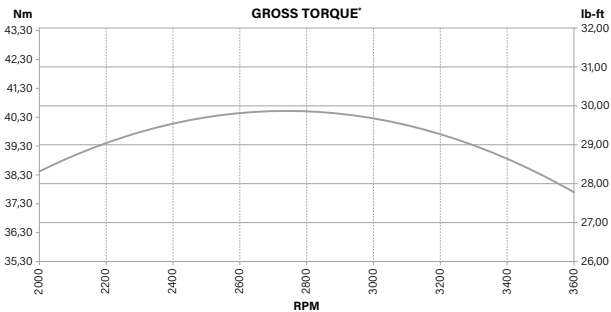

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 5,63

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.
 ** (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.