




Engine type	V-Twin, 4-stroke, air cooled, OHV (Overhead Valve)	
Model number	40R5	40N8
Series number	7160EXi	7220EXi
Gross Torque (Nm) @ 3'600 rpm	27,70*	39,57*
Displacement (cc)	656	
Cylinder	Cast iron sleeve	
Bore & stroke (mm)	75,4 x 73,4	
Fuel tank capacity (l)	NA	
Oil capacity (l)	1,9	
Dry weight (kg)	37,2	
Dimensions L x W x H (mm)	484 x 462 x 363	
Features	Advanced air filtration, full pressure lubrication with oil filter	
Optional	ReadyStart®, Electronic Fuel Management (EFM)	

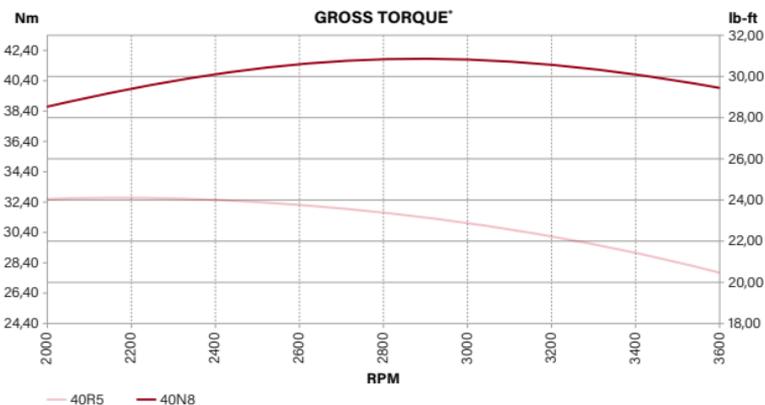

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 6,95 (average)

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.
 ** (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.