




Engine type	Single cylinder, 4-stroke, air-cooled, OHV (Overhead Valve)
Model number	19N1
Gross Power kW (HP) @ 3'600 rpm	7,5* (10,0)
Displacement (cc)	306
Cylinder	Cast iron sleeve
Bore & stroke (mm)	82,0 x 58,0
Fuel tank capacity (l)	5,3
Oil capacity (l)	1,1
Dry weight (kg)	26,0
Dimensions L x W x H (mm)	323 x 438 x 424
Features	Lo-Tone™ muffler, dual ball bearing, forged iron crankshaft
Optional	Electric start

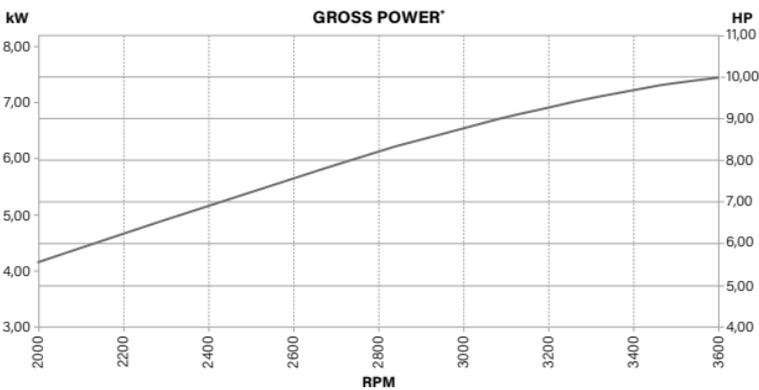

**Fuel Consumption in Litres per Hour\*\***

Load: Full  
 Litres: 2,78

\*All power levels are stated gross kilowatt per SAE J1940 as rated by Briggs & Stratton.

\*\* (Load @ 2'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.

† See [www.briggsandstratton.com](http://www.briggsandstratton.com) for warranty details.