


James Walker[®]

James Walker[®] Gylon[®] modified PTFE gaskets

- *Excellent chemical resistance*
- *Suitable for food and pharmaceutical use*
- *Resistant to cold flow / creep*
- *Useable in high pressure / temperature applications*
- *Superior performance over conventional PTFE*

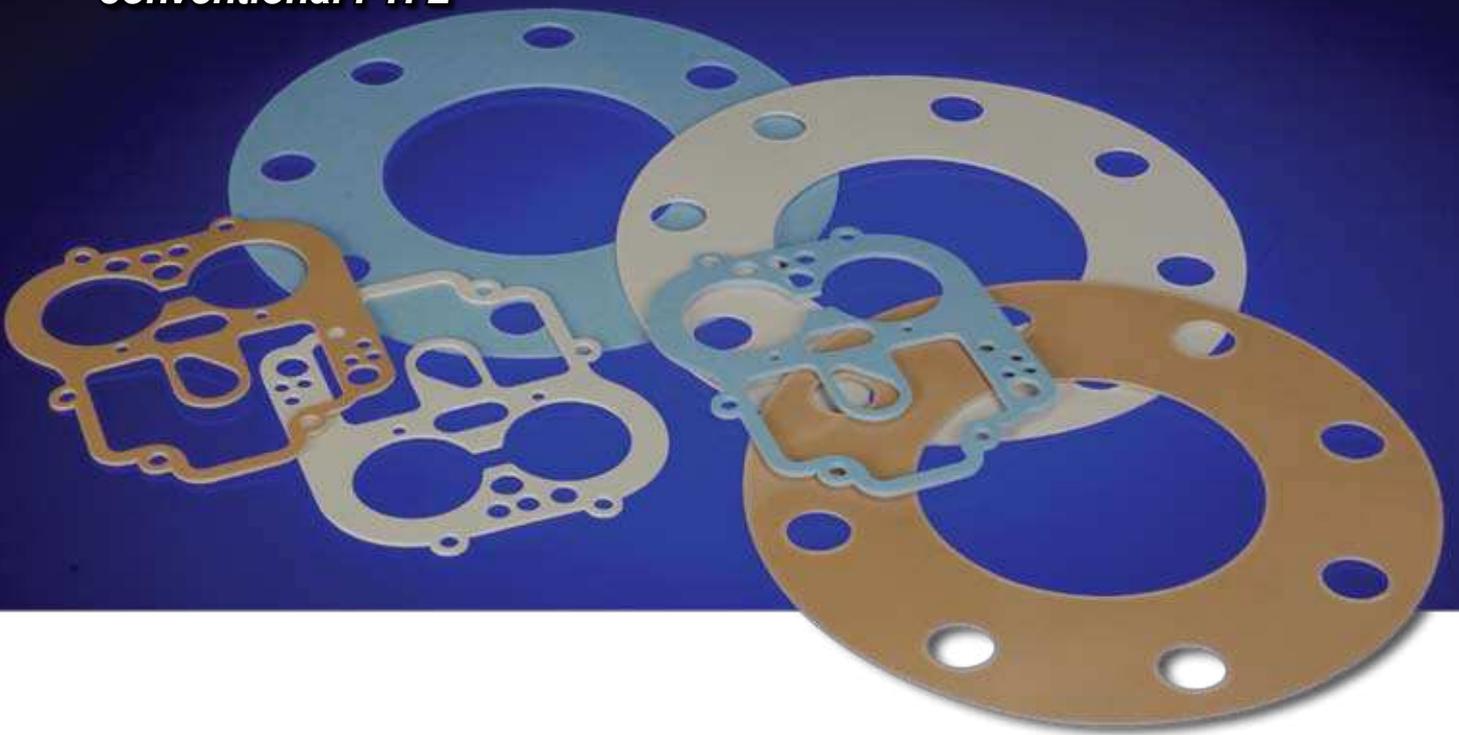

High Performance Sealing Technology



The perfect combination

James Walker® Gylon® brings together two of the most respected names in sealing technology to provide the world's industries with the products and service levels they demand; the capability to deliver and support the best, high-performance materials and provide unrivalled sealing solutions.

With over 125 years of experience in the development of sealing technology James Walker is a true global service provider with a network of group companies and distributors supplying over 100 countries. This effort is backed up by 50 distribution, engineering and customer support sites plus manufacturing bases in Europe, North America, Australasia, South Africa and Asia.

As an experienced manufacturer of class-leading, high-performance elastomers and other market-leading sealing solutions, James Walker recognises Gylon® as a best in class material that fits with the company philosophy of supplying only the best possible sealing products.

Gylon® is widely recognised as the best modified PTFE sheet material available for an extensive range of applications, particularly where aggressive chemicals are being handled or hygiene is a top priority.

Now a ground breaking agreement between James Walker & Co Ltd and Garlock Sealing Technologies means that we can provide the perfect combination; the best product for the job, in Gylon modified PTFE, backed-up by the service, support and applications engineering knowledge of James Walker.

The benefits of James Walker® Gylon®

PTFE has long been established for its excellence in chemical resistance and for being inherently hygienic, non-toxic and non-tainting. In operational use however it does have some shortcomings; being susceptible to creep under cold conditions and lacking dimensional stability when subject to thermal and pressure cycling.

The unique Gylon® manufacturing process retains all the positive characteristics of PTFE but minimises or eliminates the creep and flow problems experienced with conventional products.

The James Walker® Gylon® family of modified PTFE materials offers:

- Excellent chemical resistance
- Improved performance over conventional PTFE
- Resistance to cold flow / creep
- Temperature stable from -268°C to +260°C
- Suitable for high temperature - pressure applications
- Improved seal & excellent bolt torque retention
- Outstanding dimensional stability under thermal stress
- Reduced product loss and emissions
- Approved for pharmaceutical and food processing use
- TUV certified in accordance with TA-Luft requirements
- Resistance to wear and abrasion
- Supplied as precision cut gaskets to any shape, size and quantity or in sheet form to max size 1500mm x 1500mm
- Available in a range of 5 thicknesses
0.8mm, 1.0mm, 1.6mm, 2.0mm and 3.2mm

Health warning: If PTFE or fluoroelastomer (eg, FKM, FFKM, FEPM) products are heated to elevated temperatures, fumes will be produced which may give unpleasant effects, if inhaled. Whilst some fumes are emitted below 250°C from fluoroelastomers or below 300°C from PTFE, the effect at these temperatures is negligible. Care should be taken to avoid contaminating tobacco with particles of PTFE or fluoroelastomer, or with PTFE dispersion, which may remain on hands or clothing.

Information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but because of factors which are outside our knowledge and control and affect the use of products, no warranty is given or is to be implied with respect to such information. Specifications are subject to change without notice.


Statements of operating limits quoted in this publication are not an indication that these values can be applied simultaneously. Material Safety Data Sheets (MSDS) are available on request.

To ensure that you are working with the very latest product specifications, please consult the relevant section of the James Walker website www.jameswalker.biz

Gylon® is a registered trade mark of Garlock Sealing Technologies

James Walker® Gylon® 3500

Providing significant advantages over conventional PTFE materials in higher pressure – temperature applications, this is the ideal multi-purpose gasket for the chemical and petro-chemical industries.

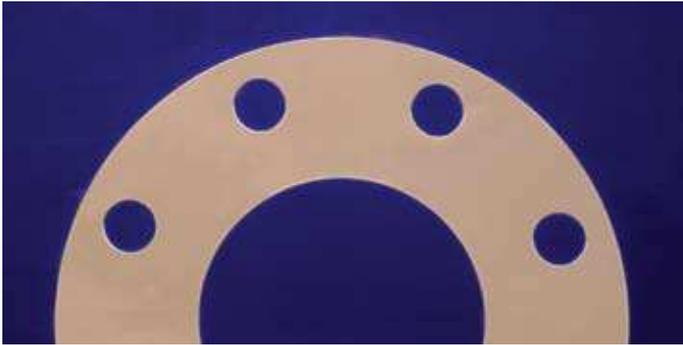

Resistant to strong acids (except hydrofluoric), solvents, hydrocarbons, water, steam, chlorine, and cryogenics. Conforms to FDA regulations.

Composition: PTFE with silica

Temperature: Minimum: -268°C (-450°F)
Continuous Max: +260°C (+500°F)

Pressure: Maximum 8.3MPa/83bar (1200psig)


Flammability: Will not burn.

Bacterial Growth: Does not support bacterial growth.

Meets Specification: ABS (American Bureau of Shipping), FDA (Food and Drug Administration) and USDA (US Department of Agriculture).

James Walker® Gylon® 3504

Highly compressible form of Gylon, this version is particularly suited to applications that are sensitive to bolt loads such as glass-lined, enamelled or plastic flanges.

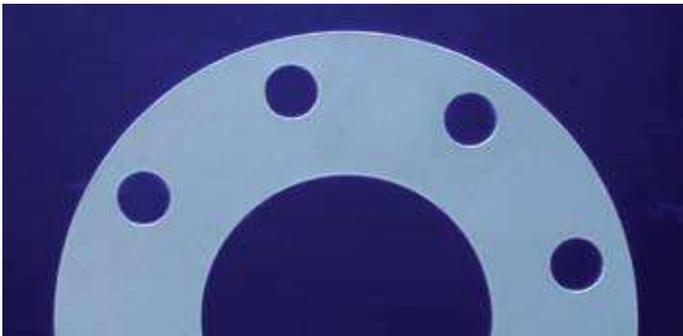

Resistant to moderate concentrations of acids and some caustics, hydrocarbons, solvents, water, refrigerants, and cryogenics. Conforms to FDA regulations.

Composition: PTFE with glass microspheres

Temperature: Minimum: -268°C (-450°F)
Continuous Max: +260°C (+500°F)

Pressure: Maximum 5.5MPa/55bar (800psig)

Flammability: Will not burn.

Bacterial Growth: Does not support bacterial growth.

Meets Specification: ABS (American Bureau of Shipping), FDA (Food and Drug Administration) and USP (US Pharmacopoeia).

James Walker® Gylon® 3510

The most resistant to chemical attack of our Gylon grades, James Walker Gylon 3510 is suitable for applications involving highly aggressive media such as hydrofluoric acid, electrolytic baths, aluminium fluoride and caustic potash solution.



Resistant to strong caustics, moderate acids, chlorine, gases, water, steam, hydrocarbons, and cryogenics. Conforms to FDA regulations.

Composition: PTFE with barium sulphate

Temperature: Minimum: -268°C (-450°F)
Continuous Max: +260°C (+500°F)

Pressure: Maximum 8.3MPa/83bar (1200psig)

Flammability: Will not burn.

Bacterial Growth: Does not support bacterial growth.

Meets Specification: ABS (American Bureau of Shipping) and FDA (Food and Drug Administration).

James Walker companies worldwide

James Walker Australia

Tel: +61 (0)2 9644 9755
Fax: +61 (0)2 9645 2009
Email: sales.au@jameswalker.biz

James Walker Benelux

(Belgium)
Tel: +32 3 820 7900
Fax: +32 3 828 5484
Email: sales.be@jameswalker.biz
(Netherlands)
Tel: +31 (0)186 633 111
Fax: +31 (0)186 633 110
Email: sales.nl@jameswalker.biz

James Walker China

Tel: +86 21 6876 9351
Fax: +86 21 6876 9352
Email: sales.cn@jameswalker.biz

James Walker Deutschland

Tel: +49 (0)40 386 0810
Fax: +49 (0)40 389 3230
Email: sales.de@jameswalker.biz

James Walker France

Tel: +33 (0)437 497 480
Fax: +33 (0)437 497 483
Email: sales.fr@jameswalker.biz

James Walker Iberica

Tel: +34 94 447 0099
Fax: +34 94 447 1077
Email: sales.es@jameswalker.biz

James Walker Ireland

Tel: +353 (0)21 432 3626
Fax: +353 (0)21 432 3623
Email: sales.ie@jameswalker.biz

James Walker Italiana

Tel: +39 02 257 8308
Fax: +39 02 263 00487
Email: sales.it@jameswalker.biz

James Walker Mfg (USA)

Tel: +1 708 754 4020
Fax: +1 708 754 4058
Email: sales.jwmfg.us@jameswalker.biz

James Walker New Zealand

Tel: +64 (0)9 272 1599
Fax: +64 (0)9 272 3061
Email: sales.nz@jameswalker.biz

James Walker Norge

Tel: +47 22 706 800
Fax: +47 22 706 801
Email: sales.no@jameswalker.biz

James Walker Oil & Gas (USA)

Tel: +1 281 875 0002
Fax: +1 281 875 0188
Email: oilandgas@jameswalker.biz

James Walker Singapore

Tel: +65 6777 9896
Fax: +65 6777 6102
Email: sales.sg@jameswalker.biz

James Walker South Africa

Tel: +27 (0)31 205 6251/2/3
Fax: +27 (0)31 205 6266
Email: sales.za@jameswalker.biz

James Walker & Co Ltd

Customer Support Centre
1 Millennium Gate, Westmere Drive
Crewe, Cheshire CW1 6AY, UK
Tel: +44(0)1270 536 000
Fax: +44(0)1270 536 100
Email: csc@jameswalker.biz

www.jameswalker.biz



CERTIFICATE No. FM 01269
BS EN ISO 9001:2000