


HORIZONTAL · SINGLE-CYLINDER  
**VANGUARD 160 – 3,7 GROSS kW\***

HORIZONTAL · SINGLE-CYLINDER



<b>Engine Type</b>	Single-cylinder, 4-stroke, air cooled, OHV (Overhead Valve)
<b>Model Number</b>	10V3
<b>Gross Power kW (HP) @ 3 600 rpm</b>	3,7* (5,0)
<b>Displacement (cc)</b>	169
<b>Cylinder</b>	Cast iron sleeve
<b>Bore &amp; Stroke (mm)</b>	62,0 x 56,0
<b>Fuel Tank Capacity (l)</b>	3,1
<b>Oil Capacity (l)</b>	0,6
<b>Dry Weight (kg)</b>	17,9
<b>Dimensions L x W x H (mm)</b>	274 x 366 x 361
<b>Features</b>	TransportGuard, dual ball bearing, integrated cyclonic air cleaner, Super Lo-Tone™ muffler
<b>Optional</b>	Electric start, low oil sensor, 45° inclination package, clear flange muffler, 2:1 and 6:1 gear reduction package

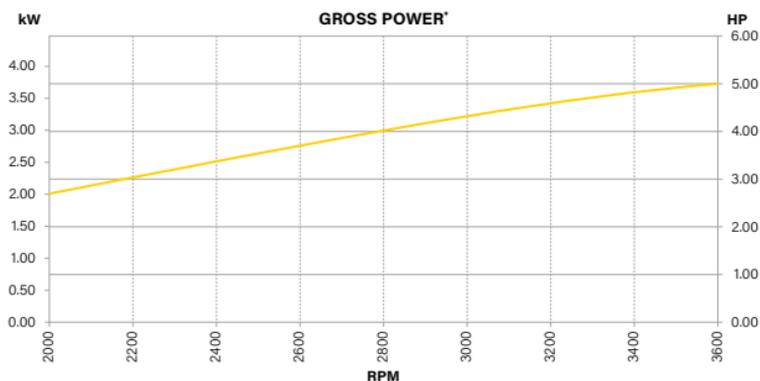

\* All power levels are stated in gross kilowatts per SAE J1940 as rated by Briggs & Stratton.

\*\* Extra year warranty after engine registration. See [www.vanguardpower.com](http://www.vanguardpower.com) for warranty details.